


ER 14505H

SPECIFICATION: ($23\pm 2^{\circ}\text{C}$)

Nominal capacity (2mA~2V):	2.4Ah
Rated voltage:	3.6V
Max constant current of discharge:	100mA
Max discharge current(pulse):	200mA
Weight:	22g
Operating temperature range:	$-55\sim 85^{\circ}\text{C}$

Discharge characteristics at $23\pm 2^{\circ}\text{C}$

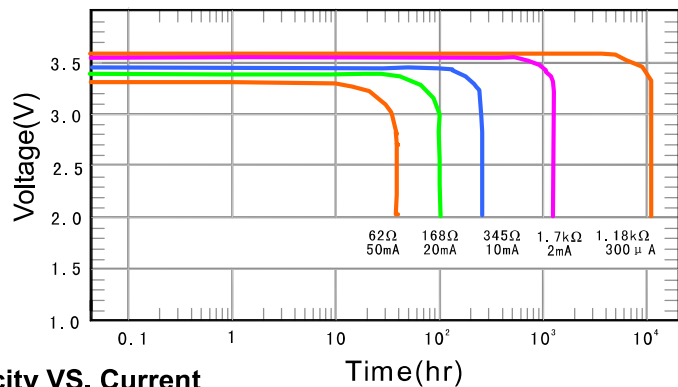

S: Standard termination

Notes:

Dimension: mm

Special terminations can be made as requested.

T: Solder tabs

P: Axial pins


Important Notes

Do not short or charge the battery.


Over-discharging, crushing, incinerating, and disassembling the battery are prohibited.

Do not heat/use the battery beyond the permitted temperature range.

Capacity VS. Current

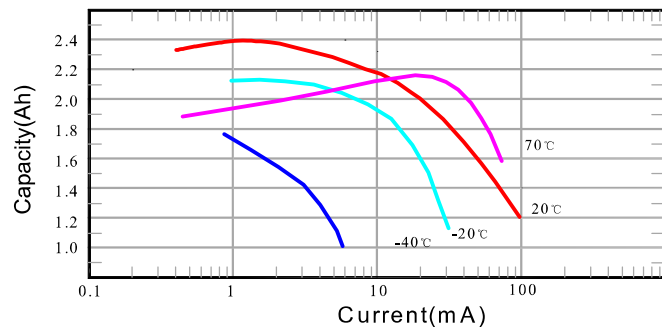

Voltage VS. Temperature

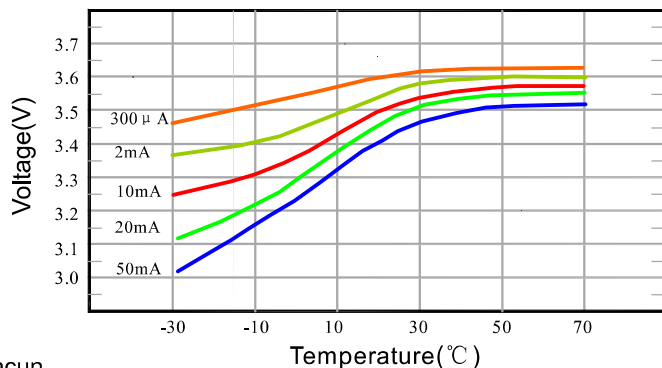

Guangzhou Markyn Battery Co., Ltd.

YiJia Industrial Park , Shixin Road 1100 ,Nancun Town,Panyu District, Guangzhou P.R.C

Tel:(86)20 — 8456 0852 Fax:(86)20 — 3476 7936

Email:sale s@gmbattery.com

U.L. Component Recognition MH 45782