


THIS DRAWING CONTAINS INFORMATION PROPRIETARY TO RF INDUSTRIES,
ANY UNAUTHORIZED USE OF THIS DRAWING IS EXPRESSLY PROHIBITED
WITHOUT WRITTEN PERMISSION FROM RF INDUSTRIES.
ANY VIOLATION IS PUNISHABLE UNDER U.S. COPYRIGHT LAWS.

ALL DIMENSIONS ARE REFERENCE ONLY



PART NO.

RSB-4350

REV	DESCRIPTION	DWN	DATE	APPROVED
B	ADD MOUNTING CONFIGURATION	KMM	1/14/93	J. BENZ
C	ENLARGE CENTER CONTACT	KMM	4/19/95	R. RICE
D	CHANGE MOUNTING CONFIGURATION	CZS	3/13/98	R. RICE
E	CHANGE SPECS, FORMAT & DWG # 7925	GGG	6/03/99	JDMc

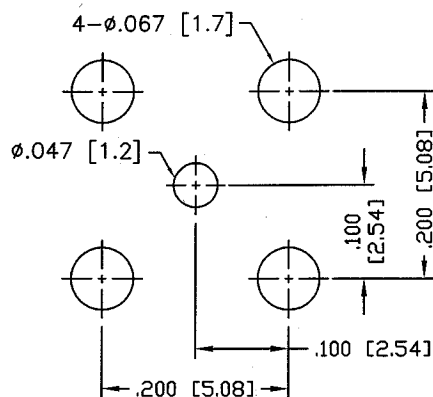

PCB MOUNTING HOLES

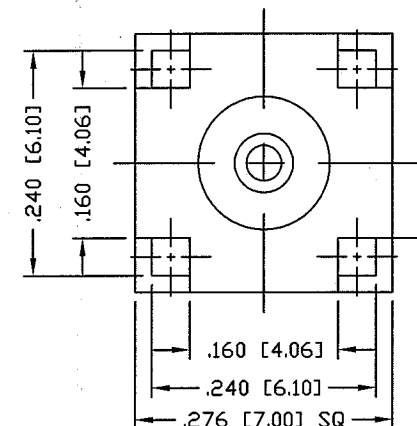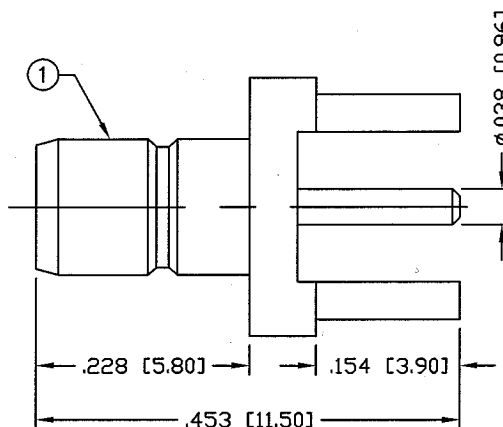

SPECIFICATIONS:

IMPEDANCE: 50 Ohms
FREQUENCY RANGE: 0-2 GHz
WORKING VOLTAGE: 335 V rms Max. @ Sea Level
CONTACT RESISTANCE: ≤ 6 m Ohm
INSULATION RESISTANCE: 1k M Ohms min.
TEMPERATURE RANGE: -65°C TO 165°C

1	BODY	1	BRASS	NICKEL, 100 μ "	008974
2	INSULATOR	1	PTFE	---	
3	PIN	1	BRASS	GOLD, 30 μ "	
4					
5					
6					
7					
8					
9					
10					
11					
12					
13					
14					
#	DESCRIPTION	QTY	MATRL	FINISH	APPROVALS

DRAWN
G. GALLEGOS
9/18/01
CHECKED
C. JONES
4/28/92

UNLESS OTHERWISE SPECIFIED:

1. REMOVE ALL BURRS
2. BREAK ALL CORNERS & EDGES .005 R. MAX.
3. CHAMFER 1ST & LAST THREADS 45°
4. SURFACE ROUGHNESS 63 FINISH MIL-STD-10
5. DIAMETERS ON COMMON CENTERS TO BE CONCENTRIC WITHIN .002 T.I.R.
6. ALL DIMENSIONS ARE AFTER PLATING.

DIMENSIONS ARE IN INCHES
AND [MILLIMETERS]

UNLESS OTHERWISE NOTED
TOLERANCES ARE:

DECIMALS	DIAMETER
.XXX $\pm$.003 [.08]	.XXX $\pm$.001 [.03]
.XX $\pm$.005 [.13]	.XX $\pm$.003 [.08]

RF connectors
DIVISION OF RF INDUSTRIES, LTD.

7610 MIRAMAR RD
SAN DIEGO, CA 92126
(858) 549-6340
(858) 549-6345 FAX

SMB VERTICAL, JACK

PCB MOUNT

SIZE	CABLE GROUP	DWG NO.	REV
A	N/A	RSB-4350	E
SCALE:	NTS	CAD FILE OUTLINE	SHEET 1 OF 1