




Model: **TX308-** (xxx)

Connector Suffix	Radio Models
M01	HYT TC-500/ 508/ 518/ 580/ 600/ 610/ 700 PD506, Motorola GP300/ SP-50/ P1225/ PRO3150/ MAG ONE/ EP150/350/ EP450/ DEP450/DTR620 /RVA50/VLR150

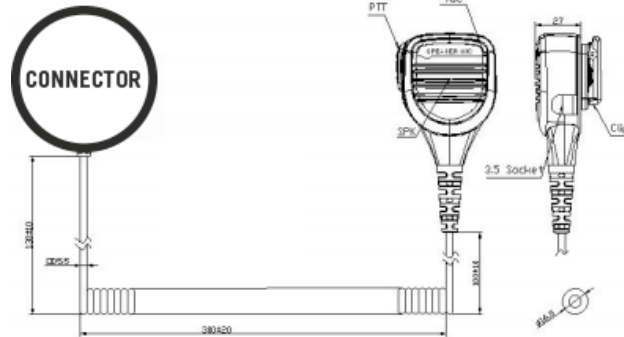

Speaker Specification:

Type:	Moving coil dynamic speaker
Impedance:	$8\Omega \pm 15\%$ at 1000Hz
Sensitivity:	92±3dB/1Watt. 0.5Meter
Frequency respond:	(F0) ~20 kHz
Rated input power:	F0~9KHz
Maximum input:	500 mW

Microphone Specification:

Sensitivity range:	-30 ± 3 dB (0 dB=1 V/Pa, at 1 kHz)
Impedance max:	2.2K Ω 1kHz (RL=2.2K Ω)
Frequency:	20 ~ 20 kHz (0 dB=1V/Pa, 1 kHz)
Operation Voltage Range:	1.0 V - 10 V(DC)