
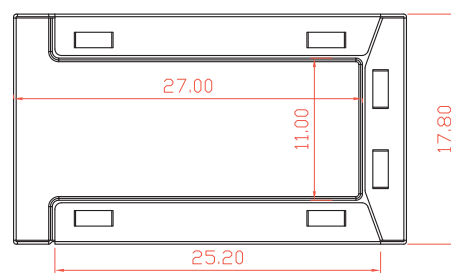



STP Cat6A Coupler

Model: LP-KJ-6A-47

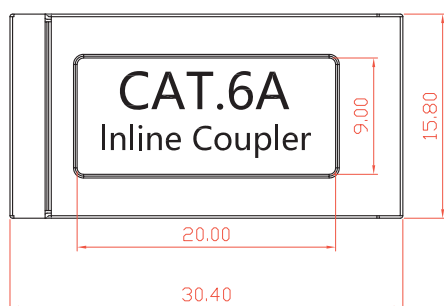

Notes:

Electrical:

1. Voltage Rating: 125 VAC RMS
2. Current Rating: 1.5 AMP
3. Contact Resistance: 100 MILLIOHMS MAX
4. Insulation Resistance: 1000 MEGOHMS MIN @500 VDC
5. Dielectric Strength: 750 VAC RMS 60 Hz, 1MIN

Mechanical:

1. Housing Material:ABS
2. PCB Material: FR-4 T=1.0mm
3. Contact Material: Phosphor Bronze
Stamp PIN T= 0.30mm
4. RJ45 JACK; IFE: 750 TIMES MIN

Enviromental:

1. Storage: -40° to +85°
2. Operation: 0° to 70°

Tolerance

0. 00-20. 00	±0. 10
20. 00-50. 00	±0. 15
50. 00-100. 00	±0. 20
100. 00-	±0. 25
Angle	±30´

Specifications

Material	Angles Projection	
ABS	Size	A4
	Scale	X:1
	Unit	mm

