


Keystone Jack Cat6A

Model: LP-KJ-UC-6A

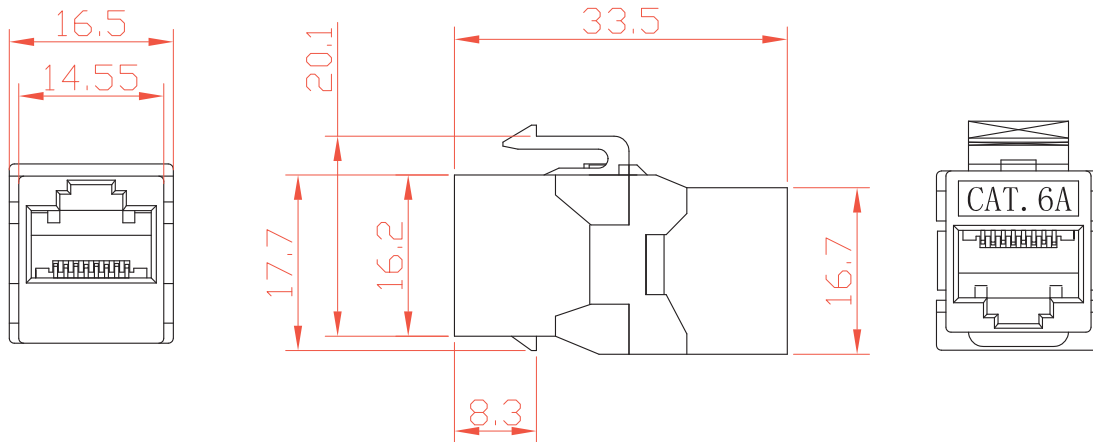

Notes:

Electrical:

1. Voltage Rating: 125 VAC RMS
2. Current Rating: 1.5 AMP
3. Contact Resistance: 100 MILLIOHMS MAX
4. Insulation Resistance: 1000 MEGOHMS MIN @500 VDC
5. Dielectric Strength: 750 VAC RMS 60 Hz, 1MIN

Enviromental:

1. Storage: -40° to +85°
2. Operation: 0° to 70°

Mechanical:


1. The Shell Material: Zinc Alloy
2. Housing Material: PC
3. Insert Material: Flame Retardancy PBT
4. PBC Material: FR-4 T= 0.30mm
5. Contact Material: Phosphor Bronze Stamp Pin T= 0.30mm
6. IDC Contact Material: Phosphor Bronze T= 0.50mm with Tin Pating
4. RJ45 Jack; LIFE: 750 TIMES MIN
5. IDC Life: 200 TIMES MIN
6. Wire: AWG 22-26

Tolerance

0. 00-20. 00	±0. 10
20. 00-50. 00	±0. 15
50. 00-100. 00	±0. 20
100. 00-	±0. 25
Angle	±30'

Specifications

Angles Projection



Size

A4

Scale

X:1

Unit

mm