


PART NO.		RQA-5405		
REV	DESCRIPTION	DWN	DATE	APPROVED
A	UPDATED ELECTRICAL SPECS	CZS	05/28/15	JDMc

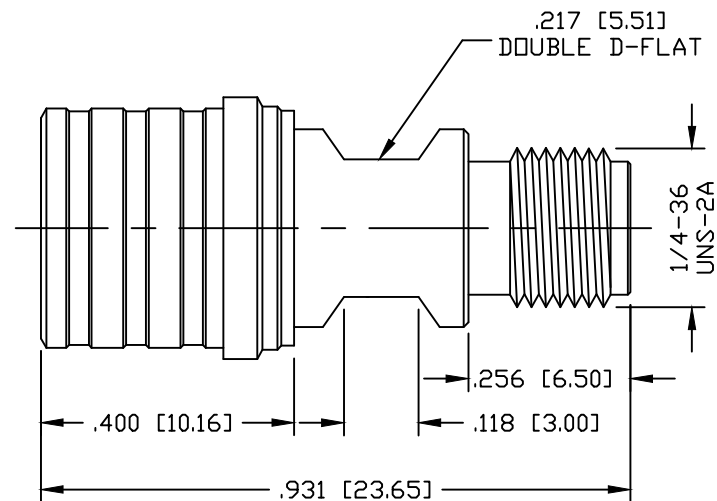

SPECIFICATIONS:

IMPEDANCE: 50 Ohms
 FREQUENCY RANGE: 0-11 GHz
 VSWR (RETURN LOSS): 32 dB MIN. @ DC-4 GHz,
 22 dB MIN. @ DC-6 GHz
 DIELECTRIC WITHSTANDING VOLTAGE: 1000 Vrms MIN.
 TEMPERATURE RANGE: -65°C TO 165°C
 3rd ORDER IM: <-155 dBc @ 1900 MHz

3	CONTACT	1	BeCu	SILVER
2	INSULATOR	1	PTFE	---
1	BODY	1	BRASS	WHITE BRONZE
#	DESCRIPTION	QTY	MATERIAL	FINISH

CUSTOMER OUTLINE DRAWING ALL DIMENSIONS ARE REFERENCE ONLY UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES AND [MILLIMETERS]		RoHS COMPLIANT PROPRIETARY AND CONFIDENTIAL THIS DRAWING CONTAINS INFORMATION PROPRIETARY TO RF INDUSTRIES. ANY UNAUTHORIZED USE OF THIS DRAWING IS EXPRESSLY PROHIBITED WITHOUT WRITTEN PERMISSION FROM RF INDUSTRIES. ANY VIOLATION IS PUNISHABLE UNDER U.S. COPYRIGHT LAWS.	RFconnectors DIVISION OF RF INDUSTRIES, LTD.		7610 MIRAMAR RD. SAN DIEGO, CA 92126 (858) 549-6340 (858) 549-6345 FAX		
DRAWN C. ZUNIGA CHECKED	05/28/15		QMA PLUG TO SMA JACK ADAPTER		SIZE A	CABLE GROUP N/A	DWG NO. RQA-5405
ORJ DRAWN C. ZUNIGA	11/04/14		SCALE: NTS	ENGINEERING ID: 008974	SHEET 1 OF 1		