




THIS DRAWING CONTAINS INFORMATION PROPRIETARY TO RF INDUSTRIES.
ANY UNAUTHORIZED USE OF THIS DRAWING IS EXPRESSLY PROHIBITED
WITHOUT WRITTEN PERMISSION FROM RF INDUSTRIES.
ANY VIOLATION IS PUNISHABLE UNDER U.S. COPYRIGHT LAWS.

ALL DIMENSIONS ARE REFERENCE ONLY

PART NO.

RFN-1023-5

REV	DESCRIPTION	DWN	DATE	APPROVED
D	CHANGE CONTACT OD AND BODY ID	KMM	1/11/95	R. RICE
E	CHANGE CONTACT OD AND DIELECTRIC ID	KMM	1/12/95	R. RICE
F	CHANGE RECOMENDED PANEL CUT OUTS	KMM	12/20/99	JDMc
G	CHANGE DIMS, FORMAT, SPECS & DWG. # 8199	GGG	1/7/02	JDMc

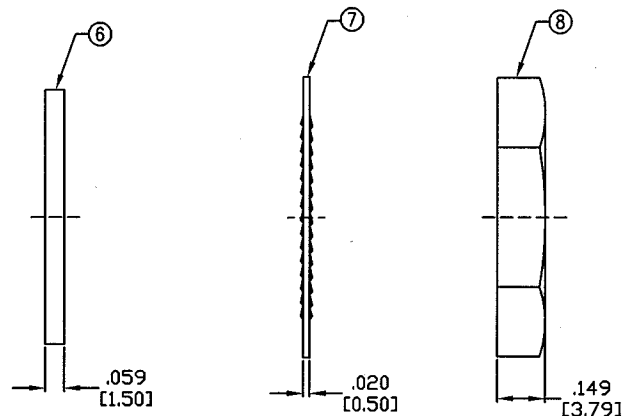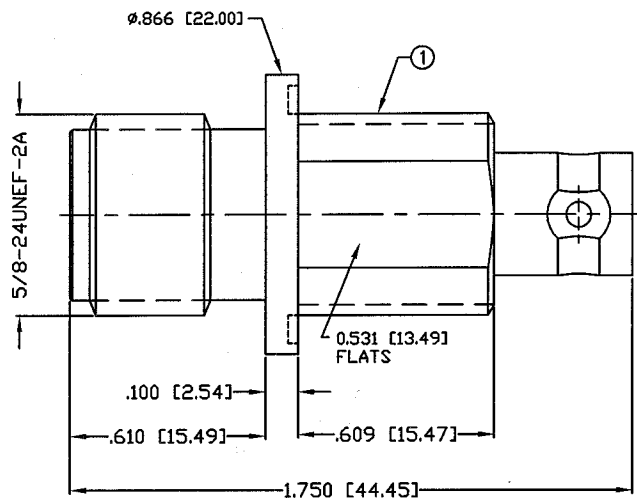

RECOMMENDED
MOUNTING HOLE

SPECIFICATIONS:

IMPEDANCE: 50 Ohms
FREQUENCY RANGE: 0-4 GHz
WORKING VOLTAGE: 335 V rms @ sea level
TEMPERATURE RANGE: -65°C TO 85°C
INSULATION RESISTANCE: 5k M Ohms min.

1	BODY	1	BRASS	NICKEL, 80 μ"	000486
2	CONTACT	1	BRASS	GOLD, 3 μ"	
3	DIELECTRIC	1	PTFE	----	
4	DIELECTRIC	1	PTFE	----	
5	PRESS FIT GRND RING	1	BRASS	NICKEL, 80 μ"	
6	GASKET	1	RUBBER	----	
7	LOCK WHASER	1	BRASS	NICKEL, 80 μ"	
8	HEX NUT	1	BRASS	NICKEL, 80 μ"	
9	WASHER	1	BRASS	NICKEL, 80 μ"	
10					DRAWN G. GALL CHECKED ORJ DRW K. MAX
11					
12					
13					
14					
#	DESCRIPTION	QTY	MATRL	FINISH	APPR

DRAWN	G. GALLEGO	01/07/02
CHECKED	[Signature]	1-7-02
ORJ DRAWN	K. MAXWELL	1/18/95

UNLESS OTHERWISE SPECIFIED:

1. REMOVE ALL BURRS
2. BREAK ALL CORNERS & EDGES .005 R. MAX.
3. CHAMFER 1ST & LAST THREADS 45°
4. SURFACE ROUGHNESS 63 FINISH MIL-STD-10
5. DIAMETERS ON COMMON CENTERS TO BE CONCENTRIC WITHIN .002 T.I.R.
6. ALL DIMENSIONS ARE AFTER PLATING.

DIMENSIONS ARE IN INCHES
AND [MILLIMETERS]

UNLESS OTHERWISE NOTED
TOLERANCES ARE:

DECIMALS	DIAMETER
.XXX±.003 [.08]	.XXX±.001 [.03]
.XX±.005 [.13]	.XX±.003 [.08]

RFconnectors
DIVISION OF RF INDUSTRIES, LTD.

7610 MIRAMAR RD
SAN DIEGO, CA 92126
(858) 549-6340
(858) 549-6345 FAX

N JACK TO BNC JACK

BULKHEAD ADAPTER

SIZE	CABLE GROUP	DWG NO.	REV
A	N/A	RFN-1023-5	G
SCALE: NTS		CAD FILE OUTLINE	SHEET 1 OF 1