


PART NO.		ROA-5411			
REV	DESCRIPTION	DWN	DATE	APPROVED	
—	ENGINEERING RELEASE		CZS 102/18/18	JDMC	

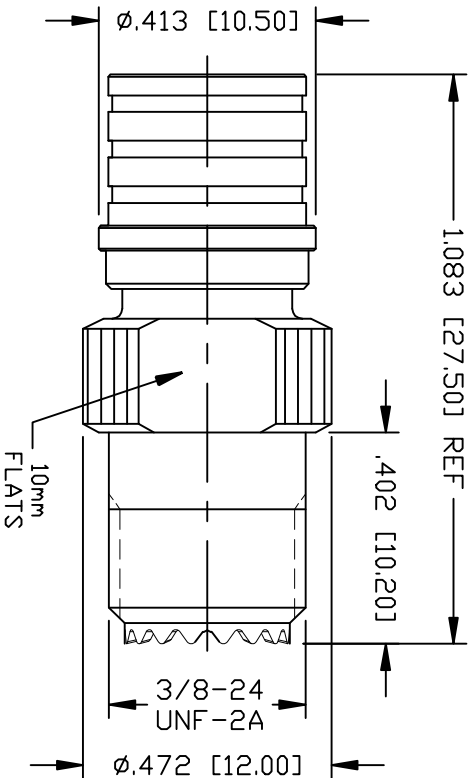

SPECIFICATIONS:

IMPEDANCE: 50 Ohms
 FREQUENCY RANGE: 0–3 GHz
 VSWR: 1.2 @ 3 GHz
 DIELECTRIC WITHSTANDING VOLTAGE: 1000 V/AC
 INSULATION RESISTANCE: 5k M Ohms min.
 TEMPERATURE RANGE: –40°C TO 155°C
 ROHS COMPLIANT

5	SHELL	1	BRASS	WHITE BRONZE
4	GROUND RING	1	BRASS	WHITE BRONZE
3	CONTACT	1	BeCu	SILVER
2	INSULATOR	1	PTFE	---
1	BODY	1	BRASS	WHITE BRONZE
#	DESCRIPTION	QTY	MATERIAL	FINISH

CUSTOMER OUTLINE DRAWING	
ALL DIMENSIONS ARE REFERENCE ONLY	
UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES AND [MILLIMETERS]	
DRAWN C. ZUNIGA	02/18/18
CHECKED	
GRD DRAWN C. ZUNIGA	02/18/18

PROPRIETARY AND CONFIDENTIAL
 THIS DRAWING CONTAINS
 INFORMATION PROPRIETARY TO
 RF INDUSTRIES, ANY
 UNAUTHORIZED USE OF THIS
 DRAWING IS EXPRESSLY
 PROHIBITED WITHOUT WRITTEN
 PERMISSION FROM RF
 INDUSTRIES. ANY VIOLATION IS
 PUNISHABLE UNDER U.S.
 COPYRIGHT LAWS.

RF INDUSTRIES DIVISION OF RF INDUSTRIES, LTD. (858) 549-6345 FAX		RFINDUSTRIES.COM 7610 MIRAMAR RD. SAN DIEGO, CA 92126 (858) 549-6340	
QMA PLUG TO MINI UHF JACK ADAPTER		ROA-5411	
CABLE GROUP	DWG #	REVISION	
N/A		—	
FORMAT	SCALE	CONTROL #	SHEET 1 OF 1
A	NTS	N/A	