

CR-ATN20 Series

20W Attenuators

Key Features

- Support frequency range from 0 to 6GHz
- High power capacity
- Compact design, small size and light weight
- Customizable products are available




Specifications


Models	CR-ATN20-**-3N (Indoor)		CR-ATN20-**-6N (Indoor)	
	CR-ATN20-**-3NR (Outdoor)		CR-ATN20-**-6NR (Outdoor)	
	(1-30dB Attenuating Value)		(1-30dB Attenuating Value)	
Attenuating Value	1-30dB			
Frequency	0-3GHz		0-6GHz	
Power Capacity	20W			
VSWR	<1.2		<1.3	
Attenuation Tolerance	1-10dB ±0.6dB	11-20dB ±0.8dB	21-30dB ±1.0dB	
Impedance	50Ω			
RF Connection	N-F/M (SMA, DIN, BNC option)			
Temperature Range	-40- +50 °C			
Size	Φ40×84 mm (or 70×60×50mm)			
Weight	165g (385g)			

Model

Models		PIM Value
CR-ATN20-**-3N-C	CR-ATN20-**-6N-C	-100dBc-- -110dBc
CR-ATN20-**-3NR-C	CR-ATN20-**-6NR-C	
CR-ATN20-**-3N-B	CR-ATN20-**-6N-B	-120dBc-- -130dBc
CR-ATN20-**-3NR-B	CR-ATN20-**-6NR-B	
CR-ATN20-**-3N-A	CR-ATN20-**-6N-A	Less than -140dBc
CR-ATN20-**-3NR-A	CR-ATN20-**-6NR-A	

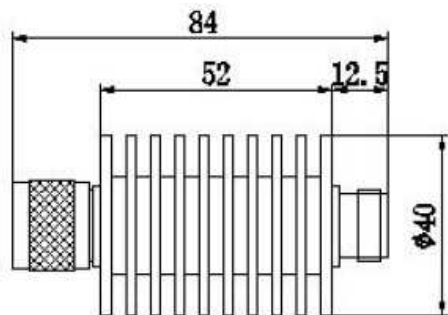

尺寸单位 (dimension): mm

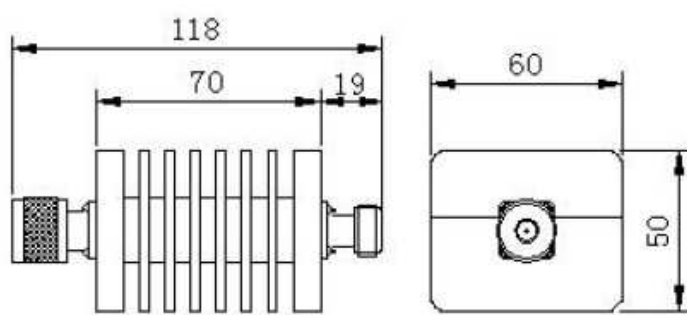

尺寸单位 (dimension): mm