



L2TNF-PL

Type N Female Positive Lock for 3/8 in LDF2-50 cable

General Specifications

| | |
|----------------|----------|
| Interface | N Female |
| Body Style | Straight |
| Brand | HELIAX® |
| Mounting Angle | Straight |


Electrical Specifications

| | |
|--------------------------------------|----------------------|
| Connector Impedance | 50 ohm |
| Operating Frequency Band | 0 – 12000 MHz |
| Cable Impedance | 50 ohm |
| 3rd Order IMD, typical | -107 dBm @ 910 MHz |
| 3rd Order IMD Test Method | Two +43 dBm carriers |
| RF Operating Voltage, maximum (vrms) | 707.00 V |
| dc Test Voltage | 2500 V |
| Outer Contact Resistance, maximum | 0.25 mOhm |
| Inner Contact Resistance, maximum | 1.00 mOhm |
| Insulation Resistance, minimum | 5000 MOhm |
| Average Power | 0.7 kW @ 900 MHz |
| Peak Power, maximum | 10.00 kW |
| Insertion Loss, typical | 0.05 dB |
| Shielding Effectiveness | -110 dB |

L2TNF-PL



Outline Drawing

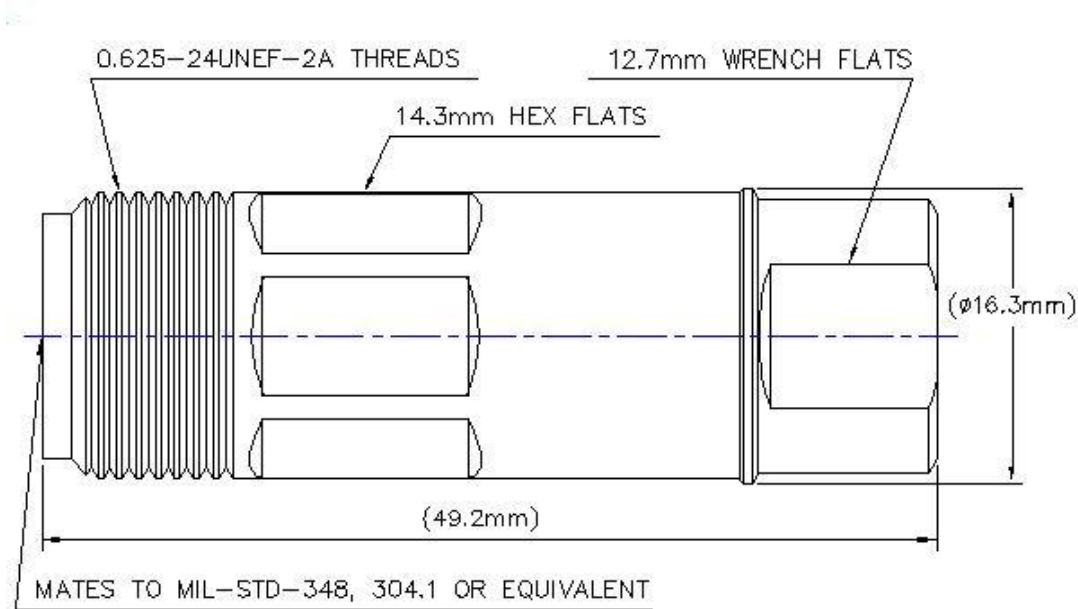

Mechanical Specifications

| | |
|-----------------------------------|-----------------------|
| Outer Contact Attachment Method | Ring-flare |
| Inner Contact Attachment Method | Captivated |
| Outer Contact Plating | Trimetal |
| Inner Contact Plating | Silver |
| Attachment Durability | 25 cycles |
| Interface Durability | 500 cycles |
| Interface Durability Method | IEC 61169-16:9.5 |
| Connector Retention Tensile Force | 670 N 151 lbf |
| Connector Retention Torque | 2.70 N-m 1.99 ft lb |
| Insertion Force | 28.00 N 6.29 lbf |
| Insertion Force Method | IEC 61169-1:15.2.4 |
| Pressurizable | No |
| Coupling Nut Proof Torque | 1.70 N-m 1.25 ft lb |

Dimensions

| | |
|--------------|--------------------|
| Nominal Size | 3/8 in |
| Diameter | 16.30 mm 0.64 in |
| Height | 16.30 mm 0.64 in |
| Length | 49.23 mm 1.94 in |
| Weight | 43.34 g 0.10 lb |
| Width | 16.30 mm 0.64 in |

L2TNF-PL

POWERED BY



Environmental Specifications

| | |
|---------------------------------|---------------------------------------|
| Operating Temperature | -55 °C to +85 °C (-67 °F to +185 °F) |
| Storage Temperature | -65 °C to +125 °C (-85 °F to +257 °F) |
| Immersion Depth | 1 m |
| Immersion Test Mating | Mated |
| Immersion Test Method | IEC 60529:2001, IP68 |
| Moisture Resistance Test Method | IEC 60068-2-3 |
| Mechanical Shock Test Method | IEC 60068-2-27 |
| Thermal Shock Test Method | IEC 60068-2-14 |
| Vibration Test Method | IEC 60068-2-6 |
| Corrosion Test Method | IEC 60068-2-11 |

Standard Conditions

| | |
|--|-----------------|
| Attenuation, Ambient Temperature | 20 °C 68 °F |
| Average Power, Ambient Temperature | 40 °C 104 °F |
| Average Power, Inner Conductor Temperature | 100 °C 212 °F |

Return Loss/VSWR

| Frequency Band | VSWR | Return Loss (dB) |
|-----------------|------|------------------|
| 0–960 MHz | 1.03 | 37.60 |
| 960–2200 MHz | 1.06 | 30.30 |
| 2200–2700 MHz | 1.08 | 28.50 |
| 2700–4000 MHz | 1.09 | 27.00 |
| 4000–6000 MHz | 1.09 | 27.00 |
| 6000–8000 MHz | 1.16 | 22.50 |
| 8000–10000 MHz | 1.27 | 18.50 |
| 10000–12000 MHz | 1.29 | 18.00 |

Regulatory Compliance/Certifications

| Agency | Classification |
|----------------------------|--|
| RoHS 2011/65/EU | Compliant by Exemption |
| China RoHS SJ/T 11364-2006 | Above Maximum Concentration Value (MCV) |
| ISO 9001:2008 | Designed, manufactured and/or distributed under this quality management system |



* Footnotes

| | |
|-------------------------|---|
| Immersion Depth | Immersion at specified depth for 24 hours |
| Insertion Loss, typical | 0.05v ⁻ freq (GHz) (not applicable for elliptical waveguide) |