

**400PUM****UHF Male for CNT-400 braided cable**

POWERED BY



General Specifications

| | |
|------------|----------|
| Interface | UHF Male |
| Body Style | Straight |
| Brand | CNT® |

Electrical Specifications

| | |
|--------------------------------------|-------------------|
| Operating Frequency Band | 0 – 1000 MHz |
| Cable Impedance | 50 ohm |
| Connector Impedance | 50 ohm |
| RF Operating Voltage, maximum (vrms) | 500.00 V |
| dc Test Voltage | 1500 V |
| Outer Contact Resistance, maximum | 9.00 mOhm |
| Inner Contact Resistance, maximum | 6.00 mOhm |
| Insulation Resistance, minimum | 5000 MOhm |
| Average Power | 580.0 W @ 900 MHz |
| Insertion Loss, typical | 0.05 dB |

Product Specifications


COMMSCOPE®

400PUM

POWERED BY

ANDREW®

Outline Drawing

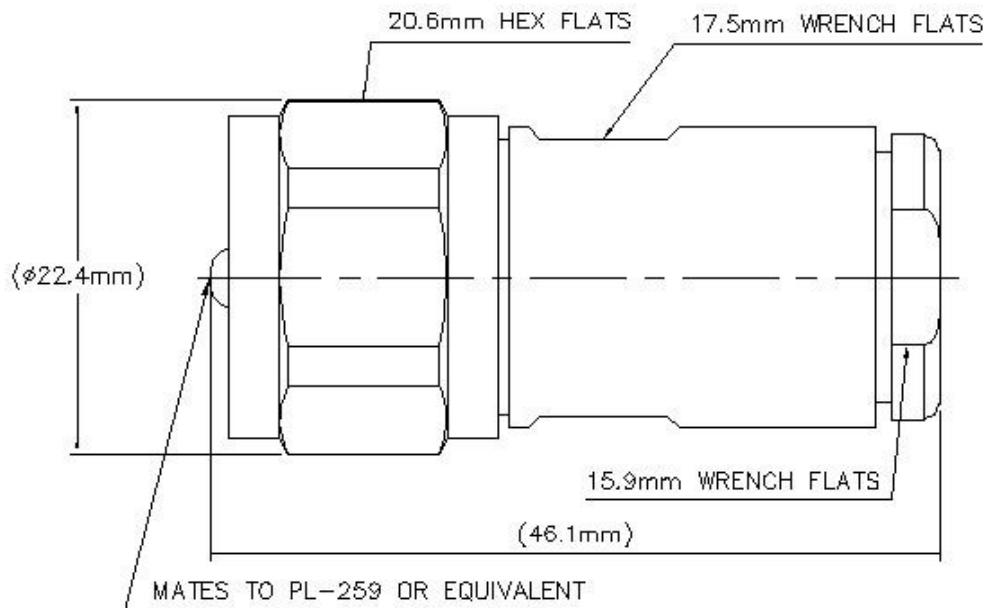

Mechanical Specifications

| | |
|-----------------------------------|-----------------------|
| Outer Contact Plating | Trimetal |
| Inner Contact Plating | Silver |
| Outer Contact Attachment Method | Clamp |
| Inner Contact Attachment Method | Solder |
| Interface Durability | 500 cycles |
| Interface Durability Method | IEC 61169-12:9.5 |
| Connector Retention Tensile Force | 330 N 74 lbf |
| Connector Retention Torque | 0.75 N·m 0.56 N·m |
| Pressurizable | No |
| Coupling Nut Proof Torque | 1.70 N·m 1.25 ft lb |

Dimensions

| | |
|--------------|--------------------|
| Nominal Size | 0.405 in |
| Diameter | 22.35 mm 0.88 in |
| Length | 46.10 mm 1.81 in |
| Weight | 73.00 g 0.16 lb |
| Width | 22.35 mm 0.88 in |

Environmental Specifications

| | |
|-----------------------|--------------------------------------|
| Operating Temperature | -40 °C to +85 °C (-40 °F to +185 °F) |
|-----------------------|--------------------------------------|

Product Specifications

COMMSCOPE®

400PUM

POWERED BY



| | |
|------------------------------------|---------------------------------------|
| Storage Temperature | -65 °C to +125 °C (-85 °F to +257 °F) |
| Immersion Depth | 1 m |
| Immersion Test Mating | Mated |
| Immersion Test Method | IEC 60529:2001, IP68 |
| Mechanical Shock Test Method | IEC 60068-2-27 |
| Climatic Sequence Test Method | IEC 60068-1 |
| Damp Heat Steady State Test Method | IEC 60068-2-3 |
| Thermal Shock Test Method | IEC 60068-2-14 |
| Vibration Test Method | IEC 60068-2-6 |
| Corrosion Test Method | IEC 60068-2-11 |

Standard Conditions

| | |
|--|-----------------|
| Attenuation, Ambient Temperature | 20 °C 68 °F |
| Average Power, Ambient Temperature | 40 °C 104 °F |
| Average Power, Inner Conductor Temperature | 100 °C 212 °F |

Return Loss/VSWR

| Frequency Band | VSWR | Return Loss (dB) |
|----------------|------|------------------|
| 0–300 MHz | 1.43 | 15.00 |
| 300–600 MHz | 1.43 | 15.00 |
| 600–1000 MHz | 1.67 | 12.00 |

Regulatory Compliance/Certifications

| Agency | Classification |
|----------------------------|--|
| RoHS 2011/65/EU | Compliant by Exemption |
| China RoHS SJ/T 11364-2006 | Above Maximum Concentration Value (MCV) |
| ISO 9001:2008 | Designed, manufactured and/or distributed under this quality management system |



* Footnotes

| | |
|-------------------------|---|
| Immersion Depth | Immersion at specified depth for 24 hours |
| Insertion Loss, typical | 0.05v ⁻ freq (GHz) (not applicable for elliptical waveguide) |