




DIRECTIONAL LEDS



3510 SERIES

SAE Class I Surface Mount

The 3510 surface mount LED warning light is designed to offer maximum performance with minimum size. This slimline LED measures only 3.3" x 1.1" and only 0.4" deep, comprised of 24 1-watt high-intensity LEDs in an ultra compact housing. Its small footprint allows for mounting in almost any location on a vehicle body. It is synchronizable with additional units and any Hide-A-LED model. The 3510 includes 16 flash patterns and is available in amber, blue, clear, green and red (colorless when not illuminated). Additional benefits of LED technology include high-intensity light output, low current draw, long maintenance-free service life and a 5-year warranty.

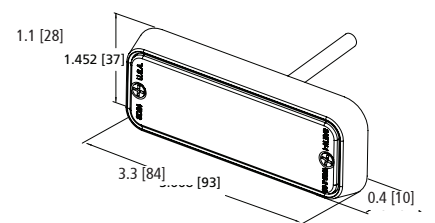

Models

PART NO.
3510X

TYPE
Single

LED COLOR






Replace "X" in part number with desired color: A=amber, B=blue, C=clear, G=green, R=red

Features and Benefits

- 12-24 VDC, 0.7 Amps
- 24 1-watt high-intensity LEDs provide exceptional warning
- 16 flash patterns including single, double, triple, quad, deci and cycle all
- Synchronizable with additional 3510s and Hide-A-LEDs
- In-line waterproof driver module allows for premium functionality and compact size
- Colorless when not illuminated
- Surface mount
- UV stabilized polycarbonate lens and pre-wired 9' cable
- Temperature Range: -22°F to +122°F (-30°C to +50°C)

Flash Patterns (16)

- | | |
|------------------|-------------------------------|
| • Quad | • Cycle |
| • Double | • Double - triple + burst |
| • Triple | • Cycle classic |
| • Deciblast | • Quad-mega |
| • Single | • Single-quad |
| • Mega | • Deciblast - quad |
| • Triple + burst | • Single - triple - deciblast |
| • Steady Burn | • Mega - triple + burst |

Accessories

- Chrome bezel: A3510BZC
- L bracket: A3510L
- Multi-angle bracket: A3510MA

