



# RUT206

## INDUSTRIAL 4G ROUTER



Energy &  
utilities



Enterprise



Industrial &  
automation



Retail



Smart city

### CONNECTIVITY

4G Cat 4, 3G, 2G

### SERIAL INTERFACES

RS232 & RS485 for serial communication

### 2-PIN POWER INPUT

Simple and suitable for industrial applications

### POE

Active and Passive PoE inputs

## Mobile

|                             |                                                                                                                                                                                                                                          |
|-----------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Mobile module               | 4G LTE Cat 4 up to 150 DL/50 UL Mbps; 3G up to 21 DL/5.76 UL Mbps; 2G up to 236.8 DL/236.8 UL kbps                                                                                                                                       |
| 3GPP Release                | Release 9                                                                                                                                                                                                                                |
| Status                      | IMSI, ICCID, operator, operator state, data connection state, network type, bandwidth, connected band, signal strength (RSSI), SINR, RSRP, RSRQ, EC/IO, RSCP, data sent/received, LAC, TAC, cell ID, ARFCN, UARFCN, EARFCN, MCC, and MNC |
| SMS                         | SMS status, SMS configuration, EMAIL to SMS, SMS to EMAIL, SMS to HTTP, SMS to SMS, scheduled SMS, SMS autoreply, SMPP                                                                                                                   |
| USSD                        | Supports sending and reading Unstructured Supplementary Service Data messages                                                                                                                                                            |
| Block/Allow list            | Operator block/allow list (by country or separate operators)                                                                                                                                                                             |
| Band management             | Band lock, Used band status display                                                                                                                                                                                                      |
| SIM idle protection service | Provides the possibility to configure the router to periodically switch to the unused SIM card and establish a data connection in order to prevent the SIM card from being blocked                                                       |
| SIM PIN code management     | SIM PIN code management enables setting, changing, or disabling the SIM card's PIN                                                                                                                                                       |
| APN                         | Auto APN                                                                                                                                                                                                                                 |
| Bridge                      | Direct connection (bridge) between mobile ISP and device on LAN                                                                                                                                                                          |
| Passthrough                 | Router assigns its mobile WAN IP address to another device on LAN                                                                                                                                                                        |

## Wireless

|                                |                                                                                                                                                                                                                                        |
|--------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Wireless mode                  | 802.11b/g/n (Wi-Fi 4), Access Point (AP), Station (STA)                                                                                                                                                                                |
| Wi-Fi security                 | WPA2-Enterprise: PEAP, WPA2-PSK, WPA-EAP, WPA-PSK, WPA3-SAE, WPA3-EAP, OWE; AES-CCMP, TKIP, Auto-cipher modes, client separation, EAP-TLS with PKCS#12 certificates, disable auto-reconnect, 802.11w Protected Management Frames (PMF) |
| SSID/ESSID                     | SSID stealth mode and access control based on MAC address                                                                                                                                                                              |
| Wi-Fi users                    | Up to 50 simultaneous connections                                                                                                                                                                                                      |
| Wireless Connectivity Features | Wireless mesh (802.11s), fast roaming (802.11r), Relayd, BSS transition management (802.11v), radio resource measurement (802.11k)                                                                                                     |
| Wireless MAC filter            | Allowlist, blocklist                                                                                                                                                                                                                   |
| Wireless QR code generator     | Once scanned, a user will automatically enter your network without needing to input login information                                                                                                                                  |
| TravelMate                     | Forward Wi-Fi hotspot landing page to a subsequent connected device                                                                                                                                                                    |

## Ethernet

|     |                                                                                                                         |
|-----|-------------------------------------------------------------------------------------------------------------------------|
| WAN | 1 x WAN port 10/100 Mbps, compliance with IEEE 802.3, IEEE 802.3u, 802.3az standards, supports auto MDI/MDIX crossover  |
| LAN | 1 x LAN port, 10/100 Mbps, compliance with IEEE 802.3, IEEE 802.3u, 802.3az standards, supports auto MDI/MDIX crossover |

## Network

|                                    |                                                                                                                                                                                                                                                                                                                                                                              |
|------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Routing                            | Static routing, Dynamic routing (BGP, OSPF v2, RIP v1/v2, EIGRP, NHRP), Policy based routing                                                                                                                                                                                                                                                                                 |
| Network protocols                  | TCP, UDP, IPv4, IPv6, ICMP, NTP, DNS, HTTP, HTTPS, SFTP, FTP, SMTP, SSL v3, TLS, ARP, VRRP, PPP, PPPoE, UPNP, SSH, DHCP, Telnet, SMPP, SNMP, MQTT, Wake on Lan (WOL), VXLAN                                                                                                                                                                                                  |
| VoIP passthrough support           | H.323 and SIP-alg protocol NAT helpers, allowing proper routing of VoIP packets                                                                                                                                                                                                                                                                                              |
| Connection monitoring              | Ping Reboot, Wget Reboot, Periodic Reboot, LCP and ICMP for link inspection                                                                                                                                                                                                                                                                                                  |
| Firewall                           | Port forward, traffic rules, custom rules, TTL target customisation                                                                                                                                                                                                                                                                                                          |
| Firewall status page               | View all your Firewall statistics, rules, and rule counters                                                                                                                                                                                                                                                                                                                  |
| Port management                    | View device ports, enable and disable each of them, turn auto-configuration on or off, change their transmission speed, and so on                                                                                                                                                                                                                                            |
| Network topology                   | Visual representation of your network, showing which devices are connected to which other devices                                                                                                                                                                                                                                                                            |
| DHCP                               | Static and dynamic IP allocation, DHCP relay, DHCP server configuration, status, static leases: MAC with wildcards                                                                                                                                                                                                                                                           |
| QoS / Smart Queue Management (SQM) | Traffic priority queuing by source/destination, service, protocol or port, WMM, 802.11e                                                                                                                                                                                                                                                                                      |
| DDNS                               | Supported >77 service providers, others can be configured manually                                                                                                                                                                                                                                                                                                           |
| DNS over HTTPS                     | DNS over HTTPS proxy enables secure DNS resolution by routing DNS queries over HTTPS                                                                                                                                                                                                                                                                                         |
| Network backup                     | Wi-Fi WAN, Mobile, VRRP, Wired options, each of which can be used as an automatic Failover                                                                                                                                                                                                                                                                                   |
| Load balancing                     | Balance Internet traffic over multiple WAN connections                                                                                                                                                                                                                                                                                                                       |
| Hotspot                            | Captive portal (hotspot), internal/external Radius server, Radius MAC authentication, SMS authorisation, SSO authentication, internal/external landing page, walled garden, user scripts, URL parameters, user groups, individual user or group limitations, user management, 9 default customisable themes and optionality to upload and download customised hotspot themes |
| Hotspot 2.0                        | Hotspot 2.0 is a Wi-Fi standard that enables seamless, secure, and automatic connection to trusted wireless networks                                                                                                                                                                                                                                                         |

---

|       |                                                          |
|-------|----------------------------------------------------------|
| SSHFS | Possibility to mount remote file system via SSH protocol |
|-------|----------------------------------------------------------|

---

|                    |                                                                     |
|--------------------|---------------------------------------------------------------------|
| Traffic Management | Real-time monitoring, wireless signal charts, traffic usage history |
|--------------------|---------------------------------------------------------------------|

**Security**

---

|                |                                                                                                                                                                                                              |
|----------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Authentication | Pre-shared key, digital certificates, X.509 certificates, TACACS+, Internal & External RADIUS users authentication, IP & login attempts block, time-based login blocking, built-in random password generator |
|----------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|

---

|          |                                                                                                                         |
|----------|-------------------------------------------------------------------------------------------------------------------------|
| Firewall | Preconfigured firewall rules can be enabled via WebUI, unlimited firewall configuration via CLI, DMZ, NAT, NAT-T, NAT64 |
|----------|-------------------------------------------------------------------------------------------------------------------------|

---

|                   |                                                                                                                                                                           |
|-------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Attack prevention | DDOS prevention (SYN flood protection, SSH attack prevention, HTTP/HTTPS attack prevention), port scan prevention (SYN-FIN, SYN-RST, X-mas, NULL flags, FIN scan attacks) |
|-------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------|

---

|      |                                    |
|------|------------------------------------|
| VLAN | Port and tag-based VLAN separation |
|------|------------------------------------|

---

|                      |                                                                                 |
|----------------------|---------------------------------------------------------------------------------|
| Mobile quota control | Mobile data limit, customizable period, start time, warning limit, phone number |
|----------------------|---------------------------------------------------------------------------------|

---

|            |                                                                                             |
|------------|---------------------------------------------------------------------------------------------|
| WEB filter | Block list for blocking out unwanted websites, allow list for specifying allowed sites only |
|------------|---------------------------------------------------------------------------------------------|

---

|                |                                                               |
|----------------|---------------------------------------------------------------|
| Access control | Flexible access control of SSH, Web interface, CLI and Telnet |
|----------------|---------------------------------------------------------------|

---

|                     |                                                                                                 |
|---------------------|-------------------------------------------------------------------------------------------------|
| Certificate Manager | Certificate creation tool allows to create CA, server, client, let's encrypt, SCEP certificates |
|---------------------|-------------------------------------------------------------------------------------------------|

---

|        |                                          |
|--------|------------------------------------------|
| 802.1x | Port-based network access control server |
|--------|------------------------------------------|

## VPN

|                    |                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
|--------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| OpenVPN            | Multiple clients and a server can run simultaneously, 27 encryption methods                                                                                                                                                                                                                                                                                                                                                                               |
| OpenVPN Encryption | DES-CBC 64, RC2-CBC 128, DES-EDE-CBC 128, DES-EDE3-CBC 192, DESX-CBC 192, BF-CBC 128, RC2-40-CBC 40, CAST5-CBC 128, RC2-64-CBC 64, AES-128-CBC 128, AES-128-CFB 128, AES-128-CFB1 128, AES-128-CFB8 128, AES-128-OFB 128, AES-128-GCM 128, AES-192-CFB 192, AES-192-CFB1 192, AES-192-CFB8 192, AES-192-OFB 192, AES-192-CBC 192, AES-192-GCM 192, AES-256-GCM 256, AES-256-CFB 256, AES-256-CFB1 256, AES-256-CFB8 256, AES-256-OFB 256, AES-256-CBC 256 |
| IPsec              | XFRM, IKEv1, IKEv2, with 14 encryption methods for IPsec (3DES, DES, AES128, AES192, AES256, AES128GCM8, AES192GCM8, AES256GCM8, AES128GCM12, AES192GCM12, AES256GCM12, AES128GCM16, AES192GCM16, AES256GCM16)                                                                                                                                                                                                                                            |
| GRE                | GRE tunnel, GRE tunnel over IPsec support                                                                                                                                                                                                                                                                                                                                                                                                                 |
| PPTP, L2TP         | Client/Server instances can run simultaneously, L2TPv3, L2TP over IPsec support                                                                                                                                                                                                                                                                                                                                                                           |
| Stunnel            | Proxy designed to add TLS encryption functionality to existing clients and servers without any changes in the program's code                                                                                                                                                                                                                                                                                                                              |
| DMVPN              | Method of building scalable IPsec VPNs, Phase 2 and Phase 3 and Dual Hub support                                                                                                                                                                                                                                                                                                                                                                          |
| SSTP               | SSTP client instance support                                                                                                                                                                                                                                                                                                                                                                                                                              |
| ZeroTier           | ZeroTier VPN client support                                                                                                                                                                                                                                                                                                                                                                                                                               |
| WireGuard          | WireGuard VPN client and server support                                                                                                                                                                                                                                                                                                                                                                                                                   |
| Tinc               | Tinc offers encryption, authentication and compression in it's tunnels. Client and server support.                                                                                                                                                                                                                                                                                                                                                        |

## BacNET

|                            |                                                                                                                                               |
|----------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------|
| Supported modes            | Router                                                                                                                                        |
| Supported connection types | IP, RTU (RS485)                                                                                                                               |
| Configuration options      | Support for multiple BACnet/IP interfaces, Network number assignment, Preconfigured BDT entries for BBMD (BACnet Broadcast Management Device) |

## OPC UA

|                            |                |
|----------------------------|----------------|
| Supported modes            | Client, Server |
| Supported connection types | TCP            |

## MODBUS

|                            |                                                                                                                                                    |
|----------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------|
| Supported modes            | Server, Client                                                                                                                                     |
| Supported connection types | RTU (RS232, RS485), TCP                                                                                                                            |
| Custom registers           | MODBUS TCP custom register block requests, which read/write to a file inside the router, and can be used to extend MODBUS TCP Client functionality |
| Supported data formats     | 8-bit: INT, UINT; 16-bit: INT, UINT (MSB or LSB first); 32-bit: float, INT, UINT (ABCD (big-endian), DCBA (little-endian), CDAB, BADC), HEX, ASCII |

**Data to Server**

|                |                                                                                                                                                                                               |
|----------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Protocol       | HTTP(S), MQTT, Azure MQTT                                                                                                                                                                     |
| Data to server | Extract parameters from multiple sources and different protocols, and send them all to a single server; Custom LUA scripting, allowing scripts to utilize the router's Data to server feature |

**MQTT Gateway**

|                     |                                                                                   |
|---------------------|-----------------------------------------------------------------------------------|
| Modbus MQTT Gateway | Allows sending commands and receiving data from MODBUS Server through MQTT broker |
|---------------------|-----------------------------------------------------------------------------------|

**DNP3**

|                            |                             |
|----------------------------|-----------------------------|
| Supported modes            | TCP Master, DNP3 Outstation |
| Supported connection types | RS232, RS485, TCP           |

**DLMS/COSEM**

|                            |                                                          |
|----------------------------|----------------------------------------------------------|
| DLMS Support               | DLMS - standard protocol for utility meter data exchange |
| Supported modes            | Client                                                   |
| Supported connection types | TCP                                                      |

**API**

|                                           |                                                                                                                                                                                                                                                                         |
|-------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Teltonika Networks Web API (beta) support | Expand your device's possibilities by using a set of configurable API endpoints to retrieve or change data. For more information, please refer to this documentation: <a href="https://developers.teltonika-networks.com">https://developers.teltonika-networks.com</a> |
|-------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|

**Site Manager**

|                 |                                                                                                                                                                                                                                                                                           |
|-----------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Supported modes | Manager                                                                                                                                                                                                                                                                                   |
| Functionalities | Centralized management of TAP access points and Teltonika's managed switches — including device pairing and grouping, FOTA updates, device status monitoring, automatic reboot scheduling with ping/wget health checks, wireless SSID configuration, and VLAN assignment across the site. |

## Monitoring & Management

|          |                                                                                                                                                                                             |
|----------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| WEB UI   | HTTP/HTTPS, status, configuration, FW update, CLI, troubleshoot, multiple event log servers, firmware update availability notifications, event log, system log, kernel log, Internet status |
| FOTA     | Firmware update from server, automatic notification                                                                                                                                         |
| SSH      | SSH (v1, v2)                                                                                                                                                                                |
| SMS      | SMS status, SMS configuration                                                                                                                                                               |
| Call     | Reboot, Status, Mobile data on/off, Output on/off, answer/hang-up with a timer, Wi-Fi on/off                                                                                                |
| TR-069   | OpenACS, EasyCwmp, ACSLite, tGem, LibreACS, GenieACS, FreeACS, LibCWMP, Friendly tech, AVSystem                                                                                             |
| MQTT     | MQTT Broker, MQTT publisher                                                                                                                                                                 |
| SNMP     | SNMP (v1, v2, v3), SNMP Trap, Brute force protection                                                                                                                                        |
| JSON-RPC | Management API over HTTP/HTTPS                                                                                                                                                              |
| RMS      | Teltonika Remote Management System (RMS)                                                                                                                                                    |

## IoT Platforms

|                              |                                                                                                                                                                                                                                                                                                       |
|------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| ThingWorx                    | Allows monitoring of: WAN Type, WAN IP, Mobile Operator Name, Mobile Signal Strength, Mobile Network Type                                                                                                                                                                                             |
| Cumulocity - Cloud of Things | Allows monitoring of: Device Model, Revision and Serial Number, WAN Type and IP, Mobile Cell ID, ICCID, IMEI, Connection Type, Operator, Signal Strength. Has reboot and firmware upgrade actions                                                                                                     |
| Azure IoT Hub                | Can be configured with Data to Server to send all the available parameters to the cloud. Has Direct method support which allows to execute RutOS API calls on the IoT Hub. Also has Plug and Play integration with Device Provisioning Service that allows zero-touch device provisioning to IoT Hubs |
| AWS IoT Core                 | Utility to interact with the AWS cloud platform. Jobs Support: Call the device's API using AWS Jobs functionality                                                                                                                                                                                     |

## System Characteristics

|               |                               |
|---------------|-------------------------------|
| CPU           | Mediatek, 580 MHz, MIPS 24KEc |
| RAM           | 128 MB, DDR2                  |
| FLASH storage | 32 MB, NOR Flash              |

## Firmware/Configuration

|                        |                                                                                                                                             |
|------------------------|---------------------------------------------------------------------------------------------------------------------------------------------|
| WEB UI                 | Update FW from file, check FW on server, configuration profiles, configuration backup                                                       |
| FOTA                   | Update FW                                                                                                                                   |
| RMS                    | Update FW/configuration for multiple devices at once                                                                                        |
| Keep settings          | Update FW without losing current configuration                                                                                              |
| Factory settings reset | A full factory reset restores all system settings, including the IP address, PIN, and user data to the default manufacturer's configuration |

## FIRMWARE CUSTOMISATION

|                     |                                                                                                                                                                             |
|---------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Operating system    | RutOS (OpenWrt based Linux OS)                                                                                                                                              |
| Supported languages | Busybox shell, Lua, C, C++                                                                                                                                                  |
| Development tools   | SDK package with build environment provided                                                                                                                                 |
| GPL customization   | You can create your own custom, branded firmware and web page application by changing colours, logos, and other elements in our firmware to fit your or your clients' needs |
| Package Manager     | The Package Manager is a service used to install additional software on the device                                                                                          |

## Serial

|       |                                              |
|-------|----------------------------------------------|
| RS232 | RS232 interface without flow control signals |
| RS485 | Half duplex (2-wire) RS485 interface         |

## SD CARD

|                 |                               |
|-----------------|-------------------------------|
| Physical size   | Micro SD (internal)           |
| Applications    | Samba share                   |
| Capacity        | Up to 2 TB                    |
| Storage formats | FAT32, NTFS, ext2, ext3, ext4 |

## POE IN

|               |                                              |
|---------------|----------------------------------------------|
| PoE ports     | 1 x PoE In                                   |
| PoE standards | Active PoE input 802.3af Class 0 on LAN port |

## Power

|                     |                                                                                                                            |
|---------------------|----------------------------------------------------------------------------------------------------------------------------|
| Connector           | 2-pin industrial DC power socket                                                                                           |
| Input voltage range | 9 - 57 VDC, reverse polarity protection, surge protection >58V @10us min                                                   |
| PoE (passive)       | Passive PoE over spare pairs 4,5 (+) / 7,8 (-). Possibility to power up through LAN port, passive PoE voltage: 16 - 57 VDC |
| Power consumption   | Idle: < 2 W, Max: < 3.5 W                                                                                                  |

## Physical Interfaces

|              |                                                                                                   |
|--------------|---------------------------------------------------------------------------------------------------|
| Ethernet     | 2 x RJ45 ports, 10/100 Mbps                                                                       |
| Status LEDs  | 3 x Connection type status LEDs, 3 x Connection strength LEDs, 2 x LAN status LEDs, 1 x Power LED |
| SIM          | 2 x SIM slots (Mini SIM – 2FF), 1.8 V/3 V, double stacked SIM tray                                |
| Power        | 1 x 2-pin power connector                                                                         |
| Antennas     | 2 x SMA for Mobile, 1 x RP-SMA for Wi-Fi                                                          |
| RS232, RS485 | 1 x 6-pin terminal block                                                                          |
| Reset        | Reboot/User default reset/Factory reset button                                                    |

**Physical Specification**

|                        |                                                                 |
|------------------------|-----------------------------------------------------------------|
| Casing material        | Anodized aluminium housing and panels                           |
| Dimensions (W x H x D) | 83 x 25 x 83 mm                                                 |
| Weight                 | 132 g                                                           |
| Mounting options       | DIN rail, wall mount, flat surface (all require additional kit) |

**Operating Environment**

|                           |                           |
|---------------------------|---------------------------|
| Operating temperature     | -40 °C to 75 °C           |
| Operating humidity        | 10% to 90% non-condensing |
| Ingress Protection Rating | IP30                      |

**Regulatory & Type Approvals**


|            |                                                                                        |
|------------|----------------------------------------------------------------------------------------|
| Regulatory | WEEE, CE, FCC, RCM, AT&T, UKCA, IC(ISED), PTCRB, RoHS, REACH, CB Scheme, ICASA, SUBTEL |
|------------|----------------------------------------------------------------------------------------|

## Certification


|                            |                                  |
|----------------------------|----------------------------------|
| EMEA                       | <a href="#">RUT206 CE/RED</a>    |
|                            | <a href="#">RUT206 UKCA</a>      |
|                            | <a href="#">RUT206 RoHS</a>      |
|                            | <a href="#">RUT206 REACH</a>     |
|                            | <a href="#">RUT206 ICASA</a>     |
| APAC                       | <a href="#">RUT206 RCM</a>       |
| AMERICAS                   | <a href="#">RUT206 FCC</a>       |
|                            | <a href="#">RUT206 IC(ISED)</a>  |
|                            | <a href="#">RUT206 PTCRB</a>     |
| CARRIER                    | <a href="#">RUT206 AT&amp;T</a>  |
| MISCELLANEOUS              | <a href="#">RUT206 CB Scheme</a> |
| SAFETY &<br>ENVIROINMENTAL | <a href="#">RUT206 WEEE</a>      |

## Hardware

### FRONT VIEW

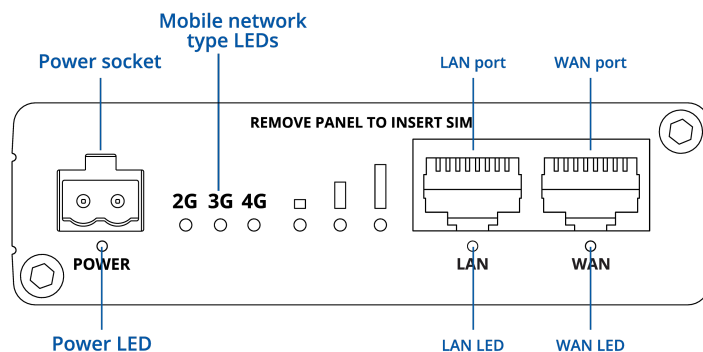


### BACK VIEW

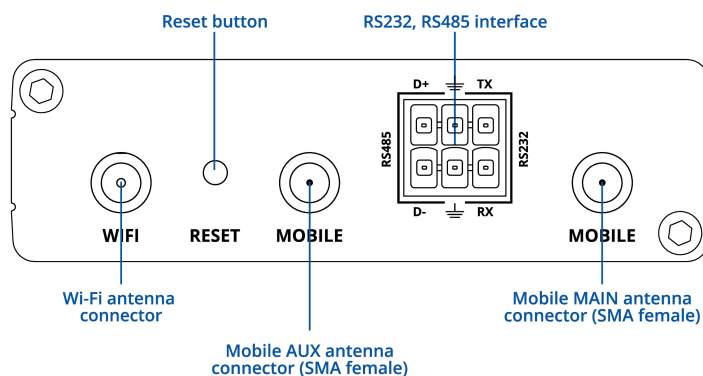


### RS485 CONNECTOR PINOUT

1. RS485 half-duplex positive signal (**D+**)
2. Device ground (**GND**)
3. RS232 driver signal (**TX**)
4. RS485 half-duplex negative signal (**D-**)
5. Device ground (**GND**)
6. RS232 receiver signal (**RX**)



### POWER CONNECTOR



## Ordering


Standard package\*




RUT206



QUICK START GUIDE



2-PIN TERMINAL BLOCK



2X3PIN CONNECTOR



HEX KEY



SIM ADAPTER KIT

\*Standard package contents may differ based on standard order codes.

For more information on all available packaging options – please [contact us](#) directly.

## Classification codes

**HS Code:** 851762

**HTS:** 8517.62.00

For more information on all available packaging options – please [contact us](#) directly.

## Available versions

| Hardware version                                                              | Supported frequencies                                                                                                                               | Standard order code / Package Contains                                                                                        |
|-------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------|
| RUT206 *1****<br>Europe <sup>1</sup> , Australia, Asia-Pacific                | <b>4G (LTE-FDD):</b> B1, B3, B5, B7, B8, B20, B28<br><b>4G (LTE-TDD):</b> B38, B40, B41<br><b>3G:</b> B1, B5, B8<br><b>2G:</b> B3, B8               | RUT206010000 / Standard package without PSU<br>RUT206010040 / Mass packing code<br>RUT206A10000/ Standard package without PSU |
| RUT206 A1****<br>Europe <sup>1</sup> , Australia, Asia-Pacific<br><b>eSIM</b> | <b>4G (LTE-FDD):</b> B1, B3, B5, B7, B8, B20, B28<br><b>4G (LTE-TDD):</b> B38, B40, B41<br><b>3G:</b> B1, B5, B8<br><b>2G:</b> B3, B8               | RUT206A10000/ Standard package without PSU                                                                                    |
| RUT206 *2****<br>North America                                                | <b>4G (LTE-FDD):</b> B2, B4, B12, B13, B14, B66, B71<br><b>3G:</b> B2, B4, B5                                                                       | RUT206020000 / Standard Package without PSU<br>RUT206020040 / Mass packing code                                               |
| RUT206 *3****<br>Latin America                                                | <b>4G (LTE-FDD):</b> B1, B2, B3, B4, B5, B7, B8, B28, B66<br><b>4G (LTE-TDD):</b> B40<br><b>3G:</b> B1, B2, B4, B5, B8<br><b>2G:</b> B2, B3, B5, B8 | RUT206030000 / Standard Package without PSU<br>RUT206030040 / Mass packing code                                               |

The price and lead-times for region (operator) specific versions may vary. For more information please [contact us](#).

1 - Regional availability - excluding Russia, Belarus & Iran


## RUT206 spatial measurements

### Available versions

|                            |                 |
|----------------------------|-----------------|
| Device housing (W x H x D) | 83 x 25 x 83 mm |
| Box (W x H x D):           | 97 x 28 x 85 mm |


## TOP VIEW

The figure below depicts the measurements of device and its components as seen from the top:

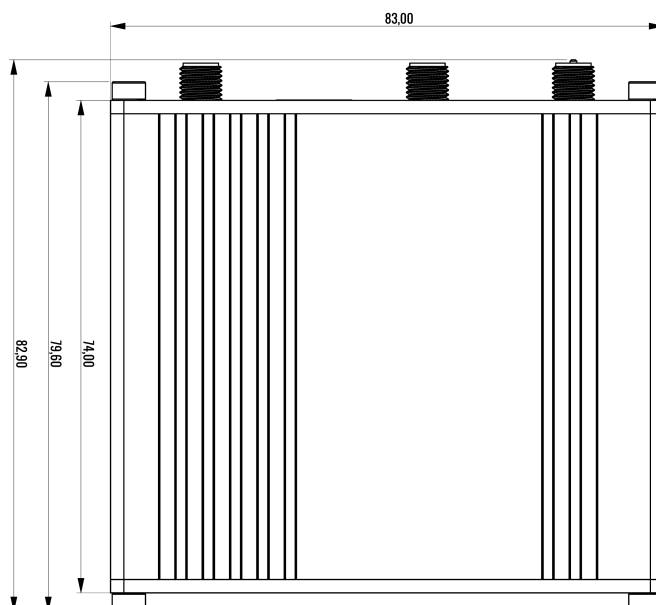


## RIGHT VIEW

The figure below depicts the measurements of device and its components as seen from the right:

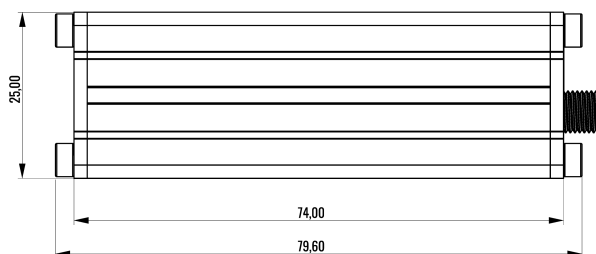


## FRONT VIEW

The figure below depicts the measurements of device and its components as seen from the front panel side:

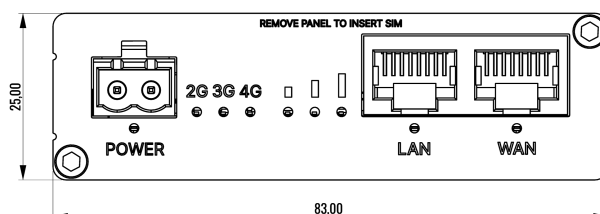

## REAR VIEW

The figure below depicts the measurements of device and its components as seen from the back panel side:

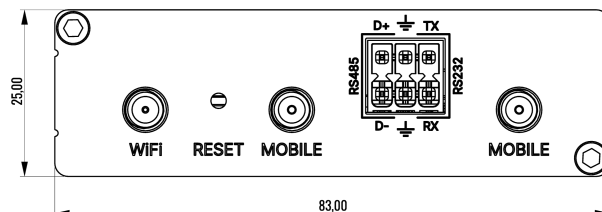

## MOUNTING SPACE REQUIREMENTS

The figure below depicts an approximation of the device's dimensions when cables and antennas are attached:

